


## BLACK SYSTEM



*The system designed to blend in with its surroundings, offering installations with extra discretion.*

The BLACK system features our S Wire suspension solution in a black finish, supplied exclusively on reels in a single system type.

This approach gives installers the flexibility to cut custom drop lengths on-site, ideal for a wide range of applications requiring a 50 kg Safe Working Load (SWL).

Each system includes high-tensile black wire rope and the corresponding Zip-Clip locking device, designed to anchor securely to both ceiling or structural points and the intended fixture.

Only genuine Zip-Clip wire rope should be used to ensure full compliance with safe working loads. Projects using non Zip-Clip wire cannot be supported.

## APPLICATIONS

SUITABLE AREAS OF USE INCLUDE, BUT ARE NOT LIMITED TO:

- Electrical containment
- Lighting and audio
- HVAC and mechanical services
- Signage and display, screens and partitions
- Acoustic and radiant heat panels
- Bracing
- Catenaries
- Theatres
- Exhibitions
- Concert halls
- Cinemas
- Retail environments



## FEATURES

- Key-free release locking device(s) for easy adjustment.
- Single die-cast locking devices (zinc alloy).
- High tensile galvanised steel wire rope.
- 18th Edition Amendment 2:2022 compliant.
- Designed-in safety factor.
- Ideal for both short drop lengths in small void spaces and for very long wire rope supports.
- Wire rope supplied on reels in dispensing box or as pre-determined lengths.
- Can be used as a wrap-around solution for applications such as I-beams or purlins.

## AVAILABILITY

Our black S Wire system is available with a Safe Working Load (SWL) of 50 kg. It comprises high-tensile wire rope and is supplied with the required Zip-Clip locking device.

- The 50 kg SWL is based on a single wire rope support when used with the correct Zip-Clip device.
- All safe working loads and certifications apply only when the system is used with genuine Zip-Clip high-tensile wire rope.
- Zip-Clip cannot verify the safety or performance of products used with non Zip-Clip wire rope and cannot support projects where it has been used.

Note: Aluminium ferrule on Black Loop-It system will be grey coloured.




## INSTALLATION

- Install ceiling/anchor termination as detailed elsewhere in this guide.

### Standard Devices

- Pass the wire rope through the Zip-Clip device in the direction of the arrow.
- Loop the wire rope through or around the anchor point.
- Pass the wire rope back through the Zip-Clip allowing 15 cm of wire rope protruding.
- Apply tension.
- Always confirm engagement of the zip clip device on the wire rope by pushing the adjustment pin in the opposite direction of the arrows indicated on the side of the device.

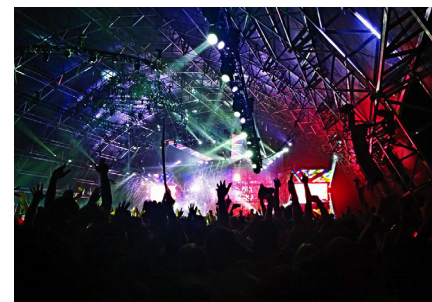

| CODE      | DESCRIPTION                              | SWL   | PACK QTY |
|-----------|--|-------|----------|
| KL100/BLK | Black Rize KL100                         | 50 kg | 10       |
| R100S/BLK | Black 100 m S wire reel in dispenser box | 50 kg | 1        |
| R200S/BLK | Black 200 m S wire reel in dispenser box | 50 kg | 1        |
| R500S/BLK | Black 500 m S wire reel in dispenser box | 50 kg | 1        |

\* **Please Note:** Pressed aluminium ferrule (swage) on Loop-It systems will be grey coloured.